

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 November 2001 (15.11.2001)

PCT

(10) International Publication Number
WO 01/87001 A2

- (51) International Patent Classification⁷: **H04R** DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (21) International Application Number: PCT/CH01/00463
- (22) International Filing Date: 26 July 2001 (26.07.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **PHONAK AG** [CH/CH]; Laubisrütistrasse 28, CH-8712 Stäfa (CH).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **HESEL, Hans** [DE/CH]; Cholibuck 12, CH-8121 Benglen (CH). **WIDMER, Christoph** [CH/CH]; Rebacher 13, CH-8342 Wernetshausen (CH).
- (74) Agent: **TROESCH, Jacques**; Patentanwaltsbüro, Troesch Scheidegger Werner AG, Schwäntenmos 14, CH-8126 Zumikon (CH).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
- upon request of the applicant, before the expiration of the time limit referred to in Article 21(2)(a)
 - without international search report and to be republished upon receipt of that report
 - without classification; title and abstract not checked by the International Searching Authority
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 01/87001 A2

(54) Title: METHOD FOR MANUFACTURING HEARING DEVICES

(57) Abstract: A hearing aid device for an individual is manufactured in that information about individual's audio needs (I_{1a}, I_{1b}), information about three-dimensional shape of the application area of the hearing device at the individual (I₂), information about additional individual not audio needs (I₃) and information (I₄) about technical feasibility of hearing devices is input to a computer system (3,) and the concept of the hearing device is three-dimensionally visualized to the individual (1). The concept as visualized is amended controlled by the individual, and the data as approved by the individual and defining for the concept are frozen for subsequent realization of the hearing device hardware.

Method for manufacturing hearing devices

The present invention is especially directed on a method for manufacturing in-the-ear hearing devices, but may also
5 be adapted for manufacturing outside-the-ear hearing devices.

Thereby, throughout the description and claims of the present invention the following terms are used as follows:

Definitions

10 • Hearing device

We understand under a hearing device a device for influencing human hearing. Such a hearing device may be a noise-protection device or even a noise-canceling device, a device for improving human hearing in special
15 situations, as e.g. in noisy environment, thereby selectively communicating with one or more than one persons, music listening in a concert hall etc. Further a hearing device may be an earphone as of a hands-free communication system, or may be an earphone for consumer
20 audio appliances.

A hearing device may thereby especially be a hearing aid device in the sense of a therapeutical device for individuals with hearing loss. As was mentioned above, the hearing device may thereby be an outside-the-ear
25 hearing device or and especially an in-the-ear hearing device.

• Retailer:

- 2 -

We understand under the expression "retailer" the instance or location, where individuals buy hearing devices.

- Audio needs:

5 The audio needs of an individual may be therapeutical so as to remedy ill hearing behavior to the standard of normal hearing. Audio needs of an individual may also be needs for noise protection, noise canceling, improved hearing in special situations as mentioned above, good
10 hearing characteristics for consumer audio consumption or for hands-free communication etc. Thus, audio needs may be subdivided in therapeutical and non-therapeutical needs.

- Application area for a hearing device:

15 We understand under this term the individual's shape of the area of his head, whereat a hearing device shall be applied to. Such application area may therefore be the ear itself, surrounding areas behind and around the ear, the ear channel with its most individual structure.
20 Thereby, not only the shape defines for the appliance area, but also the kind of structure, be it bony or rather of soft flesh or rather of cartilage, and its appearance, be it the texture or color of the skin. Further, the application area may be co-defined by
25 individual characteristics, as of the production of sweat and cerumen.

- Non-audio needs:

- 3 -

Non-audio needs of an individual and in the present context are e.g. needs with respect to aesthetic appearance as of shell colouring of a hearing device, further with respect to pricing, material of the shell surface, especially where in contact with the area of application and under consideration of individual allergies etc.

Up to now especially in-the-ear hearing aid devices are manufactured in that a individual goes to a retailer, as a consultant center. Either the individual brings, in the case of therapeutical audio needs, audiological data about his ill hearing behavior to such retailer, which data have been retrieved e.g. by a specialized medical doctor. In other cases such audiological diagnostic data are retrieved directly at the consultant's or retailer's location as specialized in audiological diagnostics and data evaluation.

At the consultant center, normally the retailer, the individual discusses with the staff his individual needs under consideration of audiologic data, if necessary, or more generically individual's audio needs as a first set of information. There is further discussed, where the hearing device should be placed, in the ear or outside the ear as examples, as well as the aesthetic appearance such a hearing device would probably result in.

Especially in the case of individual's decision to order an in-the-ear hearing device it is necessary to get information about the individual's ear channel structure as a second set of information.

- 4 -

This is normally done by means of taking a mould of the ear channel and then three-dimensionally scanning such mould. Normally, scanning is done by the hearing device manufacturer in context with manufacturing the hearing device. The retailer thereby sends the mould to the manufacturer altogether with further information collected, and the manufacturer returns after construction of the hearing aid device the hardware to the retailer or, more generically, to the consultant center for approval by the individual.

Very often the device is not approved by the individual e.g. due to uncomfortable fitting at the application area or due to aesthetics, which have turned out differently than foreseen in individual's imagination, and also because the manufacturer could not exactly know the real needs of the individual.

The retailer tries to communicate to the manufacturer further information about desired amendments on the device, which are nevertheless not always precise enough to ensure the next run of manufacturing and approval to be a full success. Very often the retailer even tries to satisfy individual's needs by experienced self-overworking of the device, especially by hand-amending the outer shell of the hearing device.

One reason for such frequent forth and back, especially of in-the-ear hearing devices, is imprecise specification of the situation as to how the mould has been taken, i.e. with respect to chin position. Another problem is that due to retailer's own shape amendment of the hearing device the

manufacturer is not informed about the finally approved and released shape, so that a replacement necessitates a complicated trial-and-error procedure, especially if the individual changed to another consultant or retailer.

- 5 It is an object of the present invention to remedy the cited drawbacks of individual hearing device manufacturing.

This is reached according to the present invention by the method of manufacturing a hearing device individually and for an individual comprising the steps of conceiving the
10 hearing device as a function of

- first information about individual audio needs;
- second information about three-dimensional shape of the application area for the hearing device at the individual;
- 15 • third information about individual non-audio needs for the hearing device;
- fourth information about feasibility of hearing devices, thereby three-dimensionally visualizing the concept of the hearing device computer-based to the individual and
20 amending said concept as visualized controlled by said individual, and freezing data defining for said concept of said device as conceived on approval by said individual or by a person authorized by said individual for subsequent realization of hearing device hardware.

- 25 Thereby, just from the beginning of conceiving the hearing device for the individual, be it a new hearing device, or be it, e.g. on repair, or on amending a hearing device, the

individual and/or a person authorized by said individual is most involved in the construing procedure in that he monitors on a visualizing screen his personal hearing device as it progresses in construction. The individual may
5 thereby influence by his individual needs and by communicating such needs finally to a conceiving computer system, the construction of the hearing device, and it is only when the individual approves the visualized concept of his future hearing device that the collected data is
10 readied for a hardware production step.

In a first preferred embodiment of the inventive method visualizing and conceiving the hearing device as a function of the above mentioned first to fourth information is performed at one local computer system, i.e. centralized.
15 Thereby, one and the same computer system provides not only for the visualization ability, but also for the computer power for three-dimensionally representing and calculating, e.g. by vector-graphic representation, the hearing device as a function of the said information input to such
20 centralized computer.

In a second and even more preferred embodiment visualizing and conceiving the hearing device, again as a function of the first to fourth information, as mentioned above, is realized at more than one decentralized computer system,
25 which systems are in mutual communication. Once the visualizing data are computed for mere visualization, there suffices a slave computer as a laptop, the screen of a PDA or even the screen of a handy to visualize the conceived hearing device to the individual.

In a further preferred mode at least two decentralized computer systems are in real-time communication, so that at each of the computers there may sit a staff member who is specialized in a specific topic, as e.g. in shell-making,
5 in functional module-assembling, in interpreting audiological data etc.

Thus, one or more than one expert join in with the individual to conceive his personal hearing device.

Also it is absolutely possible that the individual, e.g. at
10 home, conceives his future hearing device on a visualizing screen, thereby preferably in online communication with consulting experts at one or more than one computers systems or even in oral phone communication with a consultant, in a most preferred embodiment of the present
15 invention, visualizing the hearing device under construction and individual's controlling is performed at the location of a consultant. Such a consultant is most preferably a hearing device retailer.

In a further preferred embodiment the first information,
20 which is directed on audio needs of the individual, is subdivided in a subset of first information, namely about therapeutical audio needs of the individual, which information may hardly be retrieved by the individual himself. The second subset of this first information,
25 namely about non-therapeutical audio needs, as in the case of noise protection, noise canceling etc., may well be retrieved from the individual himself, so that this second subset of information for conceiving the hearing device is

- 8 -

directly communicated from the individual lastly to the conceiving and visualizing computer systems.

Thereby, in a preferred mode of operation at least a part of the first information, thus especially about
5 therapeutical needs, is retrieved at a place, which is remote from visualizing the hearing device concept to the individual. Nevertheless, this part or another part of the first information may clearly be retrieved also at the place of visualization. E.g. audiological data may be
10 retrieved at the retailer's place as the place of the consultant, at which the individual is present when conceiving his hearing device.

Additionally or alternatively at least a part of the first information may also be retrieved from a data bank, which
15 has been established from data of a previous hearing device of the individual. This will especially be the case if an existing hearing device of the individual is to be repaired or only parts thereof, as e.g. the shell is to be replaced.

In a further preferred mode of the inventive method the
20 second information, i.e. the information about three-dimensional shape of the application area of the hearing device at the individual, is retrieved by taking a mould of the application area. Thereby, in a further preferred mode such mould-taking is performed either at the specialized
25 mould center or at the location of the consultant. Thereby again, the consultant may preferably be the retailer.

Departing from such mould this mould is preferably three-dimensionally scanned, which further preferably is performed either at a mould-scanning center or at the

center, where the mould has been taken or at the location of a consultant, especially of a retailer. Latter especially then, when also mould-taking has been performed at the consultant's place.

- 5 In another preferred mode of operating the inventive method, the second information is retrieved by in-vivo scanning three-dimensionally the individual's application area. Again this is preferably performed in an in-vivo scanning specialized center or at a consultant's place,
- 10 which again may be advantageously the hearing device retailer. With respect to this second information too, it may be retrieved from a data bank, especially if the new hearing device to be conceived is based on an existing hearing device of the same individual.
- 15 In a further preferred mode of operation the fourth information, namely information about, generically spoken, feasibility of a desired hearing device, especially under technical aspects, is retrieved from at least one hearing device manufacturer. Thereby, this information is further
- 20 preferably stored in a data bank, which may be located anywhere, but has preferably to be addressable from the hearing device conceiving computer system. Preferably such a data bank is nevertheless located at the hearing device manufacturer or at a consultant center, which again may be
- 25 the hearing device retailer.

Once and according to the present invention the data defining for the concept of the device as conceived and approved by the individual is frozen, this data is transmitted to a hearing device hardware manufacturing

- 10 -

- center. Again such manufacturing center may be a hearing device manufacturer or may be located at a consultant center, especially if there is provided a stock of modules for constructing different hearing devices as well as for instance the ability of shell-making, e.g. by a procedure as known from rapid prototyping and as e.g. disclosed in the WO 01/05207, which is incorporated in the present description by reference and specifically with respect to shell-making.
- 10 Again, such consultant center may preferably be at a retailer's location, so that in a preferred mode of operation of the inventive method in fact all steps for data retrieving and hearing device hardware preparing might be performed there.
- 15 The said manufacturing center, which receives the frozen data, according to an approved hearing device concept, checks, whether a hardware hearing device may or may not be construed, which exactly matches the said frozen data. Whenever such a hearing device, which exactly matches the frozen conceptual data may not be constructed at the manufacturing center, there is conceived a novel set of data of a hearing device which may be realized and wherefrom the data matches closest the frozen data.
- 20
- Thereby a hardware hearing device is not yet constructed, but first the set of data for a feasible hearing device is retrieved, the data therefrom, as was said, matching the frozen data as closest as possible, possibly with a priority setting, about which of the first to fourth
- 25

- 11 -

information according data should match closest and which are less critical.

Then these data are retransmitted finally to the individual and visualized, so that the individual may monitor on
5 screen what a hearing device will look like, which is in fact proposed by the manufacturing center and which does not exactly match his own approved proposal.

The individual may again in a preferred mode amend such proposition up to approval and thus a new set of frozen
10 data is retrieved and retransmitted to the manufacturing center.

Especially if the frozen data transmitted to the manufacturing center do match with the data of a feasible hearing device or do only neglectably differ therefrom,
15 then at a manufacturing center there is produced hardware, be it a dummy of the hearing device or a functional hearing device.

In a preferred further mode such hardware, namely the dummy and/or the functional hearing device, is transmitted to the
20 individual and thereby, practically in parallel, also the data defining for such hardware, so that the individual may try on the hardware on one hand and on the other hand get three-dimensionally the hardware, which is just on try-on displayed on the visualizing screen. There the individual
25 may again enter amendments, if necessary, up to approval.

Such re-amended data is then retransmitted to the manufacturing center for definite (hopefully) construction of the hearing device. The hardware, which has been transmitted to the individual for try-on, is either

transmitted to the manufacturing center, or, especially in case of a dummy, is either kept for further comparative try-ons after newly constructed hardware has been received or is dispatched.

- 5 The invention under all its aspects shall now be described with the help of figures. They show:

- Fig. 1: in a schematic signal and communication flow/functional block diagram a first embodiment of the inventive method;
- 10 Fig. 2: in a representation in analogy to that of fig. 1, a preferred mode of realization of the inventive method, whereat a consultant center joins in with the individual for conceiving a hearing device;
- Fig. 3: by means of a flow-chart diagram, different possibilities of retrieving first information to be considered when conceiving the hearing device according to the figs. 1 or 2;
- 15
- Fig. 4: in a representation according to that of fig. 3 retrieving of the second information;
- 20 Fig. 5: in a representation according to that of the figs. 3 and 4, retrieving of the fourth information;
- Fig. 6: by means of a simplified communication flow/functional block diagram, a preferred mode of hearing aid hardware construction, based on conceptual data as retrieved according to the figs. 1 to 5;
- 25
- Fig. 7: again by means of a communication flow/functional block diagram or flow-chart, decision taking of

construing hardware and/or amending data for re-
approval by the individual in the hardware
construing operation according to fig. 6;

Fig. 8: by means of a representation similar to that of
the figs. 1 and 2 a preferred embodiment of
hardware approval within the inventive method.

**1. Conception of a new hearing device or
recovering/amending an existing hearing device**

10

In figure 1 there is shown, by means of a schematic signal
or communication flow/functional block diagram, the basic
conceiving step for the inventive hearing device
manufacturing, repair or retrofitting method.

15 An individual 1, who would like to order a new hearing
device, or who would like to repair e.g. a broken hearing
device, or who would like to amend his existing hearing
device due to needs which have changed between conceiving
his existing hearing device and present time, stands in
20 visual communication VIS with a display 3a of a displaying
computer 3v.

For conceiving the hearing device the following categories
of information are needed:

- First information I_1 about the individual's audio needs.
25 These needs may be therapeutical needs, which result
from diagnostic, audiological examination and may be
summarized under the term "hearing loss". The first
information may comprise or consist of such "hearing

loss" data, especially if the hearing device to be conceived is a therapeutical device in the sense of a hearing aid device. In other cases, the first information comprises or consists of non-therapeutical
5 audio information. e.g. where the hearing device to be conceived is a noise-protection device, a hearing device of a headset, e.g. for telephone applications, a headphone as for consumer audio application or is a hearing device for improving normal hearing in special
10 situations, as in noisy environment, in concert halls etc. In any case, when conceiving a new hearing device, this first information I_1 must be taken under consideration.

- Second information I_2 about the three-dimensional shape
15 of the application area of the individual for the hearing device. We understand under the individual application area for the hearing device that area, where the hearing device shall be individually applied and thus especially the ear channel shape for in-the-ear
20 hearing devices or the area surrounding one individual's ear for outside-the-ear hearing devices.

- Third information I_3 about additional individual, not audio needs for the hearing device. Such additional needs may e.g. be pricing to an individually set maximum
25 level or a range between a minimum and a maximum price etc., aesthetic appearance of the hearing device to be conceived per se and when applied to the individual's ear, further individual inconsistencies of skin with

respect to certain materials possibly leading to inflammation etc.

- The fourth information I_4 deals about technical feasibility of hearing devices. It comprises e.g. all information about modules to be possibly incorporated in a hearing device, as microphone modules, loudspeaker modules, digital processing units, operating switches, remote controls, battery modules, shell shaping and shell materials as well as colouring information, about compatibility of such modules and their technical specifications.

According to figure 1, the individual 1 transmits a subset I_{1a} of the first information to the computer system 3_v . This subset I_{1a} comprises all information about the individual's non-therapeutical audio needs. Thus, this set of information may comprise needs for noise reduction, needs for normal hearing improvement etc. The individual 1 further communicates to the computer system 3_v the third information I_3 as defined above, namely about individual's non-audio needs.

The additional subset I_{1b} of first information I_1 , especially audiological diagnostic data for conceiving a hearing aid device, the second information I_2 about three-dimensional shape of individual's application area and the fourth information I_4 about technical feasibility is applied by a set of information I as a function of I_{1b} , I_2 and I_4 to the computer system 3_v .

Under the generic aspect of fig. 1 it is only of secondary importance how and by which communication technique the set

- of information I is finally transmitted to and treated by the computer system 3_v. The visualizing computer 3_v may be just a front end computer only for visualizing purposes, whereby information treating and calculating computer power
- 5 is installed in a remote treating computer 3_t. Computer 3_v may even just be a handy, a PDA with online communication to the treating computer 3_t. In other cases the computing power of computer 3_t is incorporated in visualizing computer 3_v.
- 10 The information set I is thereby communicated to the respective computer 3_v and/or 3_t online via a communication network as via an internet-kind network or via a data carrier as by CD or tape etc. input e.g. by the individual 1.
- 15 The information I_{1a}, I₃ is input by the individual - or a consultant person - to computer 3_v which, if the computing power is remote, as at computer 3_t provides for communicating this information thereto.
- With the help of the set of information I and the
- 20 information I_{1a}, I₃ a hearing device adapted to the individual is conceived and visualized on the screen of the visualizing computersystem 3_v. The individual 1 communicates with the system 3_v up to the point, where the individual is satisfied with the three-dimensional
- 25 representation and the additional data of the intended, still conceptual hearing device as displayed on visualizing screen 3a. Amended information input by the individual 1, e.g. menu-controlled, is recognized by the computer system 3_v and/or 3_t and an amended proposition of the hearing

device is three-dimensionally displayed, still as a function of the non-individual input set of information I.

On approval of the visualized hearing device concept on screen 3a of the visualizing computer system 3_v, the individual 1 inputs an approval indication signal APR to the computer system 3_v, which causes all the instantaneous hearing device concept data to be frozen, as e.g. stored in a storage 5. This is represented in fig. 1 schematically by approval closing a storing control switch S to a storage unit 5. Again such storage 5 may be provided at system 3_v and/or 3_t.

The frozen or stored constructional data CONSTR# are now ready to be utilized for constructing the individual's hearing device.

Most important for this basic concept forming part of all variants of inventive hearing device manufacturing is the visual communication VIS of the individual 1 with a visualizing screen 3a, visualizing the hearing device concept three-dimensionally and whereat the individual may apply for changes, especially with respect to non-therapeutical audio needs as of I_{1a} and/or further non-audio needs as of I₃, up to approving the displayed three-dimensional hearing device concept.

Departing from the principal as explained with the help of fig. 1, fig. 2 shows a today most preferred variant of this procedure.

Thereby, the visualizing computer system 3_v, which may be the hearing device conceiving computer or may be a remote

- 18 -

or "slave" computer communication with a hearing aid
conceiving computer 3_t , is located at a consultant center
 C_c 7. Such a consulting center C_c is preferably at a
retailer's place. The visualizing system 3_v (+ 3_t) is
5 thereby operated by staff of the consultant center 7,
whereby during conceiving the hearing device the individual
1 is preferably personally present. Thereby, the first
information subset I_{1a} and the third information I_3 is
communicated from the individual 1 to the staff, who inputs
10 such information data to the visualizing computer system
 3_v . Thereby, the hearing device is conceived under
visualized control of the individual 1 and the staff of the
consultant center 7.

Nevertheless, it is also possible to have the individual 1
15 remote from the consultant center 7 and to have the same
display 3a on the slave remote computer display 3a' at the
remote place of the individual. In such case there is a
first visualizing computer 3_v at the center 7 and a second
one, $3_v'$ at the individual's place. As shown by dashed
20 line, the individual 1 may thereby input the information
 I_{1a} , I_3 by remote communication to the consultant center,
i.e. directly to the visualizing computer system 3_v there,
or even directly to a remote hearing device conceiving
computer system 3_t and may possibly additionally be in
25 audio communication with the staff of the consultant center
7 as by phone.

Thereby, and as was already explained with the help of
figure 1, the additional set of information I is taken into
account when conceiving the hearing aid device, this set of

information I or parts thereof being fed to the staff of the consultant center 7 and/or directly to the visualizing computer system 3_v, or, if different therefrom, to a remote hearing device conceiving computer system 3_t. In fig. 2 a possibly provided remote hearing device conceiving computer system 3_t is shown, which communicates with the visualizing computer system 3_v for receiving all the information I_{1a}, I₃ from the individual 1, and possibly all, or at least a part of the information set I, if that information is present at the center 7.

Once the individual 1 approves APR.1 on the three-dimensionally visualized hearing device, as was explained with the help of fig. 1, conceived at the visualizing computer system 3_v and/or at a remote conceiving computer system 3_t, the constructional data CONSTR.# for the hearing device as approved are frozen, as e.g. stored in store 5 e.g. at one of the computer systems 3_v and/or 3_t. Such freezing of the constructional data CONSTR.# may be bound to additional approval APR.7 by the staff of the consultant center 7.

In fig. 3 there is schematically shown, how the first information I₁ as defined above is possibly retrieved. As the first information I₁ indicates individual audio needs, the source of that information is the individual 1. The subset of first information I_{1b}, i.e. that information about therapeutical needs of the individual 1, is recovered, in one possibility, by an audiologist AUDIOL. or a medical doctor specialized on diagnosis of hearing behavior and equipped with the respective apparatus for

- 20 -

diagnostic measurements. Therefrom the subset I_{1b} is retrieved. Nevertheless, this subset of information I_{1b} may also be retrieved directly at the consultant center 7, as was introduced in fig. 2, if the respective manpower and equipment is available there. The subset of first information I_{1a} is directly retrieved from the individual 1.

Whenever there is no need to construe a completely new hearing device, but an existing hearing device is to be updated or repaired, then at least a part of the first information I_1 may be retrieved from a data bank as shown at 9 of fig. 3, which data bank may be located e.g. at the hearing device manufacturer, at the consultant center 7 as examples, or even may be provided at the individual 1, so e.g. on an identifying chip card or even within the former hearing device, wherein all data according to the first information I_1 for the former device is stored.

Providing such a data bank 9 for the first information remote from the individual 1, but - as will be shown - also for the other categories of information, and by installing communication and addressing capabilities to address such data bank 9 via a worldwide network as by internet, it becomes possible to update or repair an individual's hearing device practically everywhere in the world by retrieving the identifying data, e.g. at an abroad consulting center.

In fig. 4 there is schematically shown retrieving of the second information I_2 , i.e. about three-dimensional shape

of the individual's application area. Again the source of such information is clearly the individual 1.

In a first embodiment a mould 11 is taken from the individual's application area, which may be done, as
5 schematically represented in fig. 4, e.g. at the consulting center 7, or at a specialized mould center 13. The mould 11 is then scanned as shown by functional block 14 of fig. 4. Scanning the mould 11 may be done at the same location, where the mould 11 is taken or may be done remote from that
10 location, in a specialized mould scanning center 15, whereby the mould 11 is sent to such a scanning center 15. Thus, scanning may be realized, in a preferred mode, at the consulting center 7, or at the mould center 13, or at the mould scanning center 15.

15 There results from the mould scanning 14 the second information I_2 about three-dimensional shape of the individual's application area.

In a further embodiment, as also shown in fig. 4, the application area of the individual 1, be it for outside-
20 the-ear hearing devices the area around the ear or the ear itself, or, for inside-the-ear hearing devices, the ear channel, is in-vivo scanned three-dimensionally at an in-vivo scanning center 16. Such a scanning center 16 may again be installed at the consulting center 7 or at a
25 specialized in-vivo scanning center 17. From such in-vivo scanning 16 there results the three-dimensional information data I_2 of individual's application area.

Here again, whenever there is no need to construe a completely new hearing device, but there is rather the need

- 22 -

to update or repair or newly adapt an existing hearing device, the second information I_2 has already been retrieved for conceiving the existing hearing device. In this case for the said repair or updating, reference is
5 taken on data bank 9 according to that of fig. 3, wherein the three-dimensional information about individual's application area is stored too.

Turning now to fig. 5, retrieval of the fourth information I_4 is schematically shown. From the manufacturer or the
10 different sub-manufacturers 18 of hearing devices data about hearing device feasibility as defined above is deposited in a technical data bank 20. This data bank 20 may be located at the manufacturer 18 itself, or at the consultant center 7. From this data bank 20 the necessary
15 information I_4 about feasibility of hearing devices is retrieved.

Turning back to the representation of fig. 2 during conceiving a novel hearing device or upgrading or repairing an existing hearing device, it might be advantageous for
20 the staff of the consulting center 7 to on-line communicate with external resources, as e.g. with a hearing device manufacturer. In such a case, preferably the computer system 3v, which provides for visualizing the hearing device concept to the individual, and one or more than one
25 additional remote computer systems are in on-line communication, so that experts at the remote computer systems as e.g. at the manufacturer may advise the hearing device conception. This leads to grouping two or more than

two specialized experts in a conference manner to assist in conceiving an optimum hearing device for the individual.

After this procedure of hearing device conceiving and as was schematically shown in the figs. 1 and 2, data CONSTR.#
5 which defines for the hearing device concept are ready for being the basis of subsequent hearing device hardware construction.

2. Manufacturing hardware

In fig. 6, again in a schematic signal and communication
10 flow/functional block diagram the manufacturing process is shown, departing from the data CONSTR.# as shown at 5 of the figs. 1 and 2, which defines for the approved hearing device concept. According to fig. 6 this data CONSTR.# is transmitted to an assembling location 22. The assembling 22
15 may thereby be executed at the location of the consulting center 7 or at the manufacturer of hearing aid device 18.

Standard hardware 24 in a stock or manufactured just in time is transmitted HW_a to the assembling location 22. If assembling 22 is performed at the consulting center 7, then
20 preferably stock 24 of standard hardware STHW components is also provided at the consulting center 7. If assembling 22 is performed at the hearing device manufacturer 18, then preferably stock 24 or respective just in time manufacturing is provided at the manufacturer 18 or
25 respective subcontractors of such manufacturer 18.

As was explained before, besides of standard hardware STHW like microphone modules, battery modules, digital processor modules, switches, loudspeaker modules etc., non-standard

- 24 -

hardware is also to be incorporated in the individual hearing device as designed. This non-standard and thus individual hardware primarily consists of the hearing device's shell: The shell has to be adapted, according to the second information I_2 , to the three-dimensional shape of individual's application area. Although and as shown in dashed lines in fig. 6, it might be advisable to transmit I_{4c} , i.e. the definitely selected standard hardware information out of I_4 , to stock or just in time manufacturing 24, if remote from assembling 22

The definitely selected second information I_2 out of CONSTR.# is provided to individual hardware construing 26. This individual hardware construing primarily consists of shell making as was mentioned above. The information I_2 is therefore fed to such individual hardware making 26, thereby especially to the shell maker. There an individually adapted shell, which also fits the selected hardware, is construed. This is done in a preferred embodiment by techniques, which are known from rapid prototyping. We thereabout refer to the following patents and patent applications of the applicant, namely to: WO 01/05207.

These techniques allow industrial and commercial manufacturing of individual hearing device shells.

Again, the location of individual hardware making 26 may be at the consultant center 7, or at a specialized shell making center 28, which may be located at the location 18 of the hearing device manufacturer.

As shown in fig. 6 by double-line arrow, standard hardware HW_a is delivered from standard hardware stock or just in time manufacturing 24 to the assembling 22, whereas individually tailored hardware HW_b is transmitted from individual hardware manufacturing 26 to the assembling 22. This individual hardware is manufactured just in time.

Whenever assembling 22 may be performed exactly matching the conceptual data CONSTR#, assembling 22 results either in a hardware hearing device 32, which exactly accords to the conceptual needs, or possibly first in a dummy hearing device DUMMY30. Clearly for construing a dummy hearing device, only dummy standard modules are built in a shell, if such modules are built in the shell at all. The object of realizing a dummy 30 of a hearing device is to first get approval of the individual on exact matching of the shape to his individual application area, which matching is, under the aspect of comfort for the individual and possibly also of aesthetics, very critical and of high importance.

Thus, there results in this case a hearing device dummy 30 or a hearing device 32, which respectively match with the information CONSTR#.

During assembling and/or readying the hardware at stock or just in time production 24 and/or individual hardware production 26, the case may arise where the conceptual data CONSTR# may not be exactly fulfilled. In this case the involved instances as assembling 22 and hardware providers 24, 26 target at a solution which is closest possible to the solution defined by the said data CONSTR. #, whereby different priorities of departing from these approved data

- 26 -

CONSTR.# may be fixed. It might be that requirements according to the third information I_3 , namely not-audio individual needs, may be set on a lower priority with respect to fulfilling than audio information according to the first information I_1 and the second information I_2 according to the three-dimensional application area data. In all such cases and as shown in fig. 6, from assembling 22 or possibly also from hardware preparing 24 and/or 26 the approved conceptual data CONSTR# are respectively amended, as schematically shown in fig. 6 by Δ #. Thereby, there is in fact established an amended set of data REAL#, which has not been approved by the individual. Obviously this data is again stored according to storing or freezing 5 of figs. 1 or 2 and as shown in fig. 6 at 5₁.

15 If the differences, which have to be made with respect to the approved data CONSTR# are extensive, then there might be not much sense to produce a hearing aid device 32 or even a dummy 30 at all. Thus, in such a "feasible" case the data REAL# are first retransmitted to the visualizing computer system 3_v as shown in fig. 1 of fig. 2. There, visualization of the hearing device according to the data REAL# is established and the individual 1 once again has the opportunity to either approve or to apply additional changes. In this case a new set of approved constructional data CONSTR# is established. If the amendments or changes 25 of the originally approved data CONSTR# are of minor importance, they form the basis for construing the hearing aid device 32 or the dummy 30.

Up to the point whereat the differences of approved hearing device defining data CONSTR# from data REAL# of a most matching hardware hearing device are small enough, there is established looping between assembling 22 and the
5 individual's approval, thereby minimizing more and more such differences.

This matching approach procedure is schematically shown in fig. 7. The approved constructional data CONSTR# are checked with the real constructional data REAL#. If they
10 match, a dummy or a hearing device is construed. If they do not match, it is checked whether the data difference is significant enough to refrain from construing any hardware. Then the real constructional data REAL# are transmitted for visualizing to the individual 1. If such difference is not
15 significant or becomes not significant anymore, then one proceeds to dummy or hearing device hardware production.

After this process there results either a dummy hearing device or a functional "prototype" hearing device.

3. Hardware approval by the individual

20 In fig. 8 there is shown in a representation according to that of fig. 2 how hardware approval is performed by the individual 1. The result of the hardware manufacturing step is, as was explained, a dummy of the hearing device, as shown at 30 of fig. 6, and/or a functional hearing device
25 32. The respective hardware, dummy and/or hearing device 30, 32 are transmitted to the place where the individual 1 is personally present at. Therefore, and following the principal of fig. 1, this hardware is transmitted to the

individual 1 directly or, following up the system of fig. 2
and as shown in fig. 8, to a consultant center 7a, which
needs not necessarily be the same as was used by the
individual 1 to conceive the concept of the hearing device
5 and as shown in fig. 2. Nevertheless, it might be the same
consultant center. In any case, be it dummy 30 or hearing
device 32, such hardware is personally transmitted to the
individual 1, who performs the try-on.

If a dummy has been transmitted then the try-on has the
10 only objects to evaluate whether three-dimensional shape of
the hearing device fits the respective application area at
individual's ear being around the ear or the ear itself for
outside-the-ear application, or be it the ear channel for
inside-the-ear applications and of checking on aesthetic
15 appearance.

If a functional hearing device has been constructed and is
transmitted to the individual 1, such try-on will also be
directed on the audio-effects of the hearing device,
further possibly on handability of switches etc. Again, if
20 the individual 1 does not approve, in the case of a dummy,
about shape-fitting and aesthetics, or, in the case of a
functional device, additionally on functional
characteristics of the hearing device, the individual 1 may
again change or amend the data of the hardware device in
25 communication via staff of the consultant center 7a and on
screen, i.e. in visual communication with display screen 3a
of the visualizing computer 3v, which is, as was explained
above, possibly combined with conceiving computer 3t.

To do so, parallel to transmitting the hardware 30 and/or 32 to the individual 1, the set of data REAL#, which exactly accords with the hardware transmitted, is transmitted finally to the visualizing computer system 3v.

5 The individual 1 not only tries on the hardware 30/32, but has also, on screen 3a, the three-dimensional representation of the tried on hardware and may, on disapproval with the hardware, enter, possibly with the help of the staff of the consultant center 7a, desired

10 further amendments.

Thereby and in close analogy to the system as was explained with the help of fig. 2, there is established a new set of data CONCTR# on approval, especially by the individual 1. Clearly here too, establishing an approved set of data

15 CONCTR# may also be linked to the approval of the staff of consulting center 7a.

This data, i.e. the approved data CONCTR# of fig. 8, is fed into the manufacturing cycle again, as shown at 5 of fig. 6.

20 Thus, by the inventive concept of a method for producing hearing aid devices there is established an intense interaction between the individual 1 and conception, then construction of his individual hearing device. This is established by the fact that the individual 1 is personally

25 involved in these conception and construction procedures by getting the opportunity to watch on screen his personal hearing device already in the conceptual phase and also later for possible corrections on a dummy or hearing aid "prototype". Clearly, such prototype may be definite, if

according to fig. 8 the individual directly approves on the hearing device 32, which was transmitted to him as a result of first constructional attempt.

Claims:

1. A method for manufacturing a hearing device individually for an individual, comprising the steps of conceiving the hearing device as a function of
 - 5 • first information about individual audio needs;
 - second information about three-dimensional shape of the application area for the hearing device at the individual;
 - third information about individual non-audio needs for
10 the hearing device;
 - fourth information about feasibility of hearing devices; thereby three-dimensionally visualizing the concept of the hearing device computer-based to the individual and amending said concept as visualized controlled by said
15 individual,
 - freezing data defining for said concept of said device as conceived on approval by said individual or by a person authorized by said individual for subsequent realization of hearing device hardware.
- 20 2. The method of claim 1, further comprising visualizing and conceiving said hearing device as a function of said first to fourth information at one local computer system.
3. The method of claim 1, further comprising visualizing and conceiving said hearing device as a function of said
25 first to fourth information at more than one decentralized computer systems being in mutual communication.

4. The method of claim 3, at least two of said decentralized computer systems being in real-time communication.

5. The method of claim 3, further comprising visualizing
5 said concept to said individual by means of a computer system controlled as a slave computer system by a further computer system or by means of a PDA screen or a handy screen respectively controlled by said further computer system

10 6. The method of claim 1, further comprising visualizing and controlling said concept by said individual at the location of a consultant.

7. The method of claim 6, wherein said consultant is a hearing device retailer.

15 8. The method of claim 1, further comprising subdividing said first information into a subset of first information about therapeutical audio-needs of the individual and a subset of first information about non-therapeutical audio-needs of the individual and providing said second subset of
20 information for conceiving said hearing device in direct communication by said individual.

9. The method of claim 1, further comprising the step of retrieving at least a part of said first information at a place remote from said visualizing.

25 10. The method of claim 1, further comprising retrieving at least a part of said first information at the place of said visualizing.

11. The method of claim 10, thereby selecting said place to be the place of a consultant.
12. The method of claim 11, said place of said consultant being the location of a hearing device retailer.
- 5 13. The method of claim 1, further comprising retrieving at least a part of said first information from a data bank established from data of a previous hearing device of said individual.
- 10 14. The method of claim 1, further comprising retrieving said second information by taking a mould of said application area.
- 15 15. The method of claim 14, further comprising taking said mould at a specialized mould center or at the location of a consultant.
- 16 16. The method of claim 15, wherein said place of said consultant is the location of a hearing device retailer.
17. The method of claim 14, further comprising three-dimensionally scanning said mould.
- 20 18. The method of claim 17, further comprising performing said mould scanning at a specialized scanning center or at a specialized mould-taking center or at the location of a consultant.
- 25 19. The method of claim 18, wherein said location of said consultant is the location of a retailer.
20. The method of claim 1, further comprising retrieving said second information by in-vivo scanning three-dimensionally said individual's application area.

- 34 -

21. The method of claim 20, further comprising performing said in vivo scanning at a specialized in vivo scanning center or at a consultant's place.
22. The method of claim 21, wherein said consultant's
5 place is the location of a hearing device retailer.
23. The method of claim 1, further comprising retrieving at least a part of said second information from a data bank comprising data of an existing hearing device of said individual.
- 10 24. The method of claim 1, further comprising retrieving said fourth information from at least one hearing device manufacturer.
25. The method of claim 24, further comprising storing said fourth information in a data bank.
- 15 26. The method of claim 25, further comprising locating said data bank at said hearing device manufacturer or at a consultant center.
27. The method of claim 26, wherein said consultant center is a hearing device retailer.
- 20 28. The method of claim 1, further comprising transmitting said frozen data to a hearing device hardware-manufacturing center.
29. The method of claim 28, wherein said hearing device hardware-manufacturing center is a hearing device
25 manufacturer or a consultant center.
30. The method of claim 29, wherein said consultant center is at a hearing device retailer's location.

31. The method of claim 28, wherein at said manufacturing center there is checked whether a hearing device exactly matching said frozen data may be realized or not.
32. The method of claim 31, wherein whenever a hearing
5 device exactly matching said frozen data may not be constructed, there is conceived data at said assembling center of a hearing device, which may be realized and which matches closest said frozen data.
33. The method of claim 32, wherein said data of said
10 hearing device matching closest is retransmitted and a hearing device, which accords with said retransmitted data is visualized to said individual for re-approval and freezing or for further amendment.
34. The method of claim 31, wherein there is construed at
15 said manufacturing center a dummy of a hearing device or a functional hearing device, closest possible matching said frozen data
35. The method of claim 34, further comprising
20 transmitting said dummy and/or said functional hearing device to said individual.
36. The method of claim 35, thereby transmitting the data
25 defining for said dummy and/or said functional hearing device for visualizing said transmitted dummy and/or functional hearing device to said individual for further amendment and approval.
37. The method of claim 28, wherein at said manufacturing center a dummy of a hearing device according to said frozen data or a shell of a functional hearing device according to



- 36 -



said frozen data is construed by means of an additive build-up process as known from rapid prototyping.


38. The method of claim 28, wherein said manufacturing center is located at the location of a consultant center or
5 at a hearing manufacturer.

39. The method of claim 38, wherein said consultant center is a retailer for hearing devices.

40. The method of claim 1, wherein said hearing device is a hearing aid device.

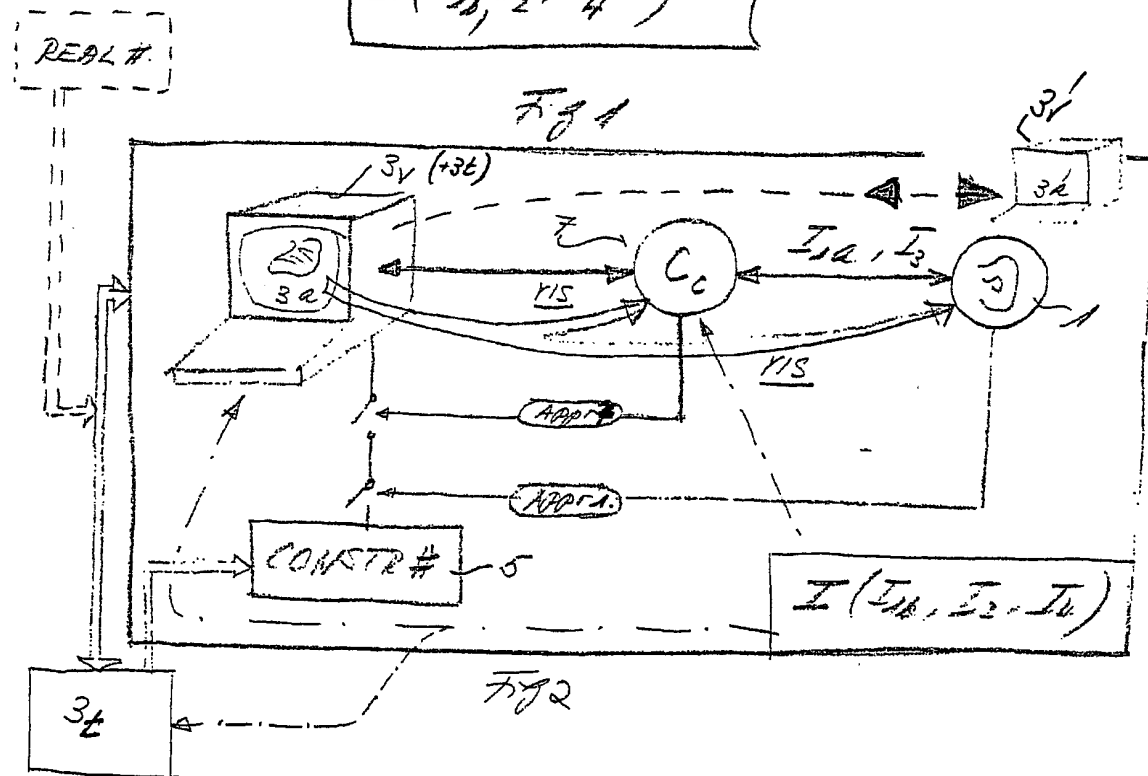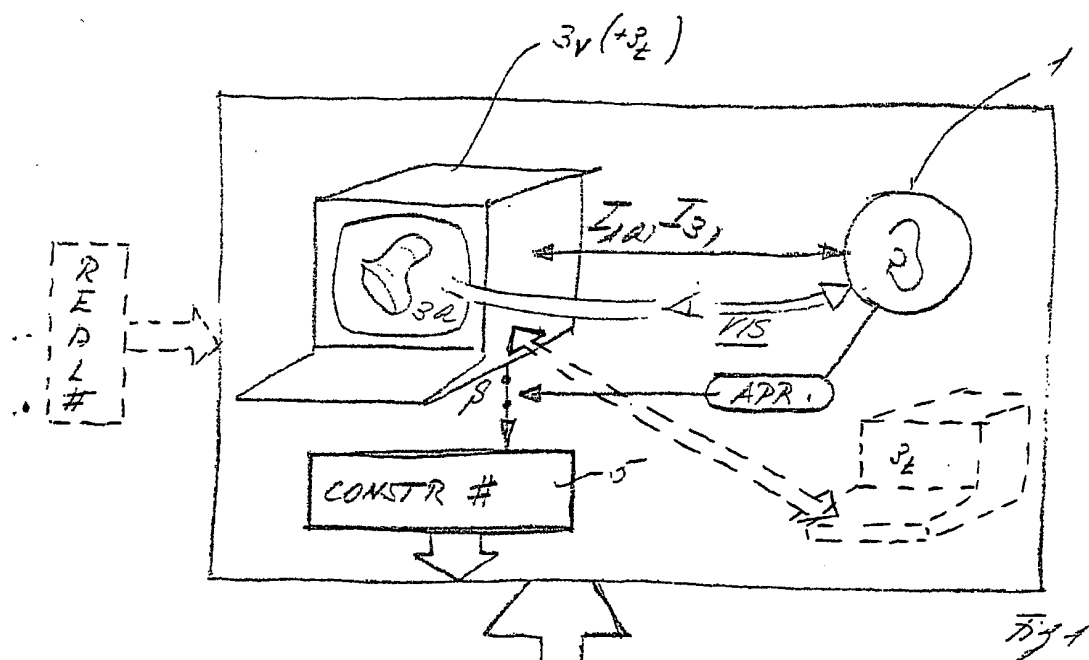

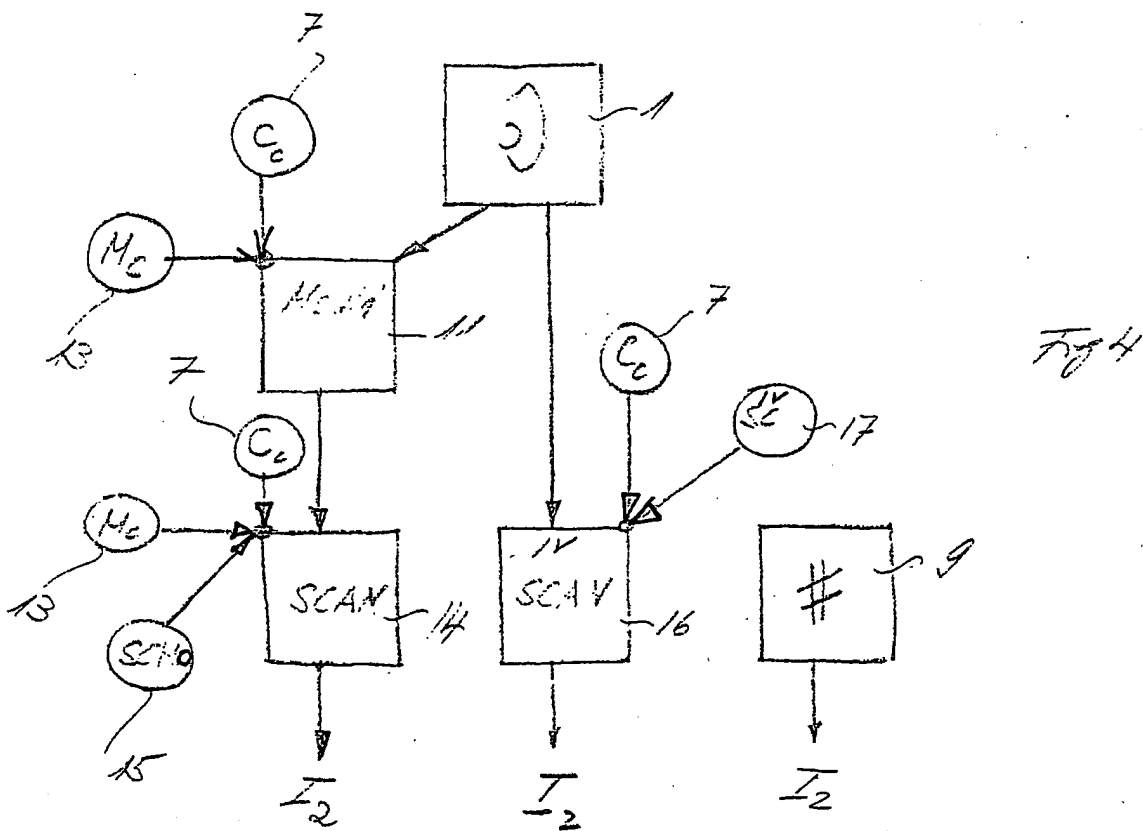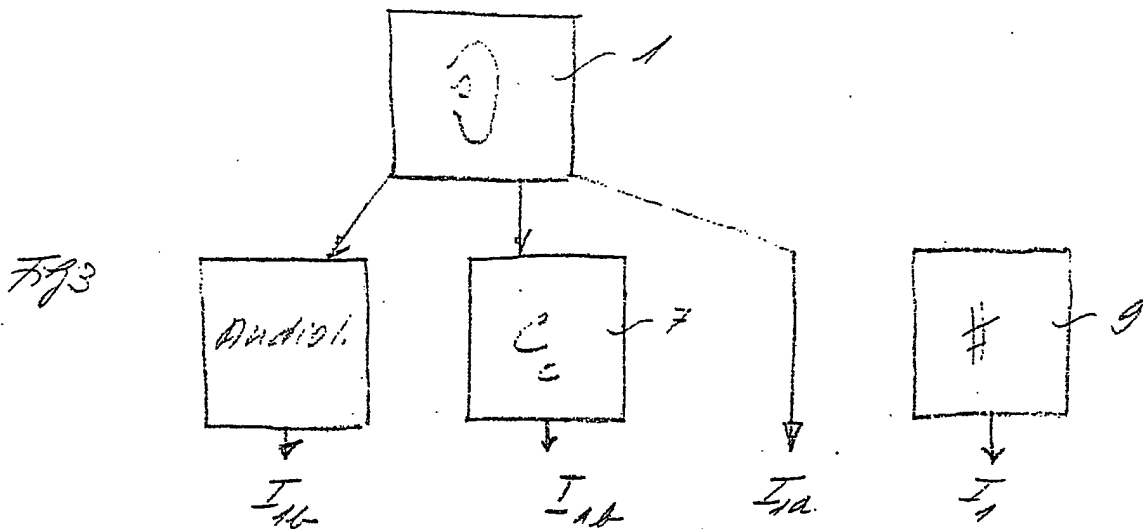

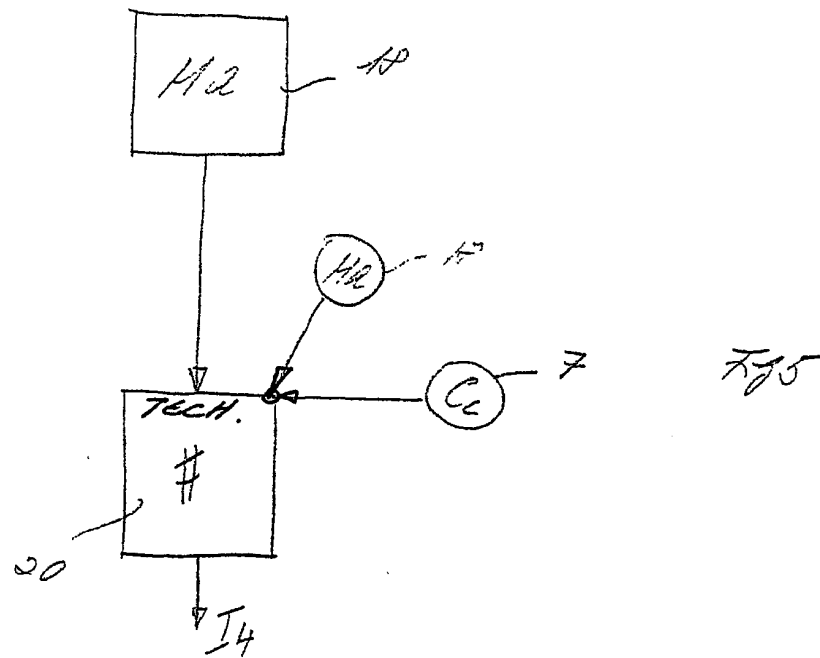

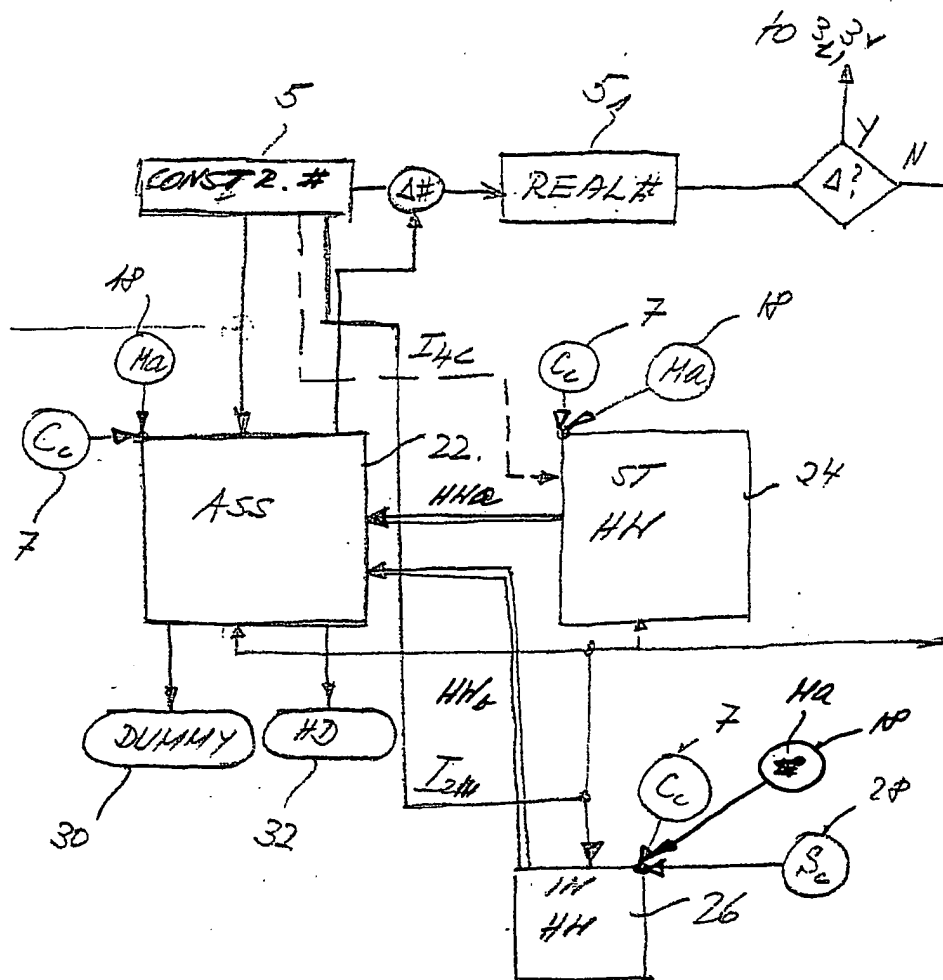


Fig 6

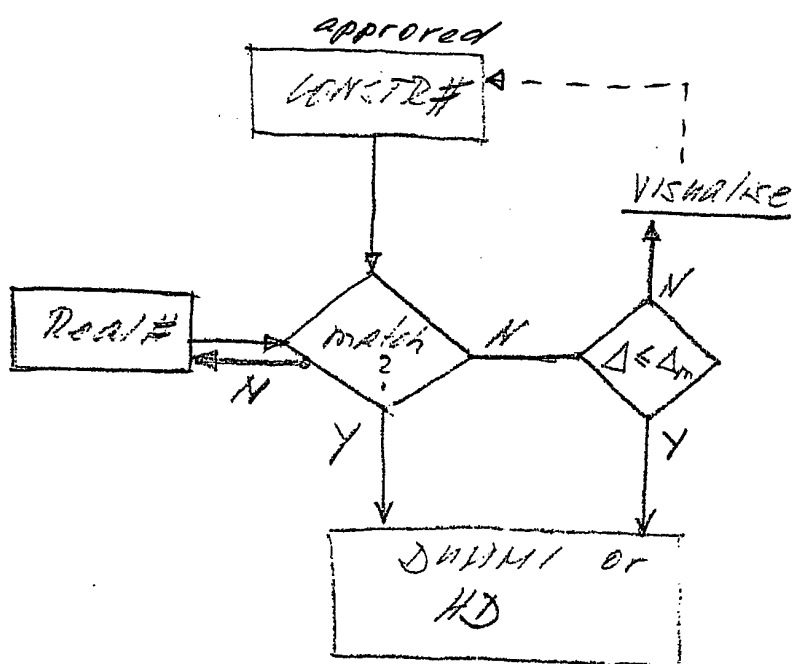


Fig 7

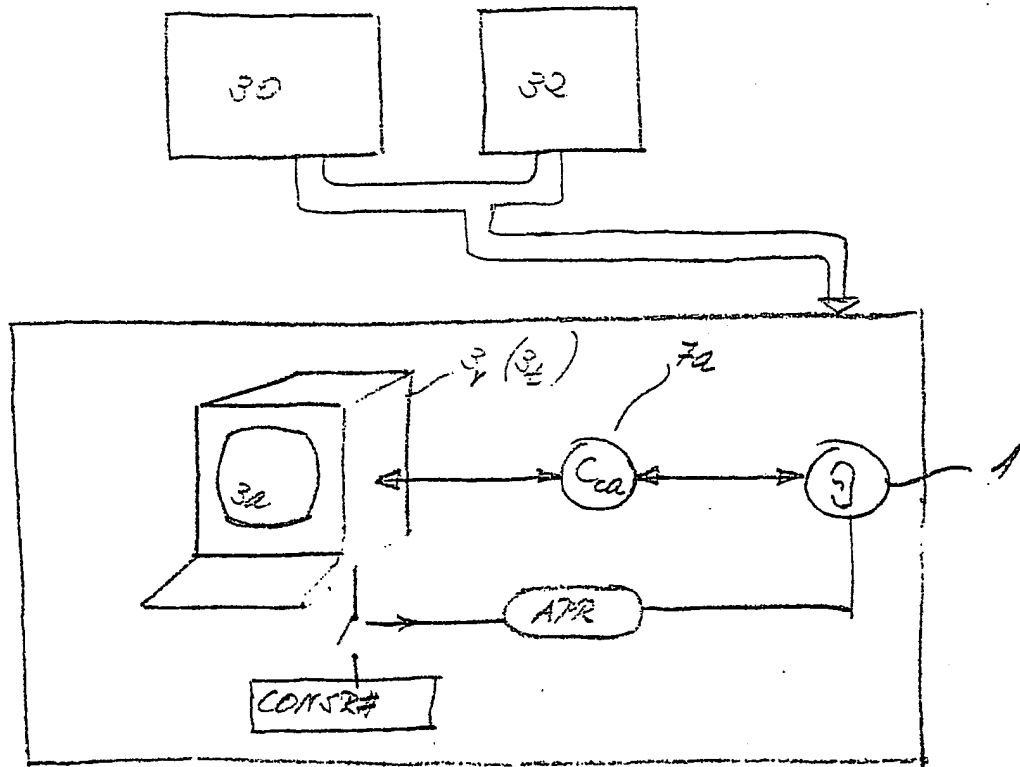


Fig 6

This Page Blank (uspto)